



**ZASTAVA  
KAMIONI**



**New Turbo Rival 4x4**





# ZASTAVA KAMIONI

ZASTAVA KAMIONI d.o.o, Kragujevac

- u restrukturiranju

Kosovska 4 · 34000 Kragujevac · Republika Srbija

tel: ++381 34 336 160 · fax: ++381 34 335 319





e-mail: prodaja@zastava-kamioni.co.rs

www.zastava-kamioni.co.rs



New TurboRival 4x4

TIP I VRSTA MOTORA	<b>EURO 3</b>	<b>SOFIM 8140.43 S</b> - Dizel, četiri takta sa direktnim ubrizgavanjem goriva, (COMMON RAIL)
RADNA ZAPREMINA (cm <sup>3</sup> )		2800
MAKSIMALNA SNAGA PRI 3600 o/min.		92 KW / 125 KS
MAKSIMALNI OBRTNI MOMENT PRI 1800 o/min.		290 Nm
VRSTA HLAĐENJA		VODENO
SPOJNICA		Suva sa jednim diskom i mehaničkom komandom od 10 1/2"
MENJAČ		IVECO 2826.5 Mehanički sa 5 sinhronizovanih stepena prenosa napred i hodom nazad
KOČNICA		Hidraulična servokočnica sa ABS-om, depresorom i dva nezavisna kruga, napred disk, pozadi doboš kočnica
UPRAVLJAČ		Hidraulički sa servo dejstvom

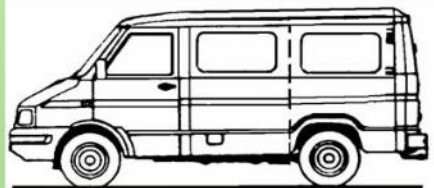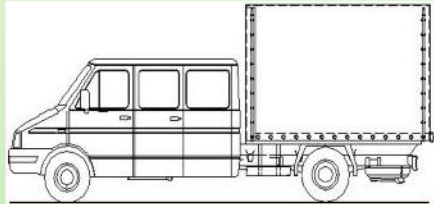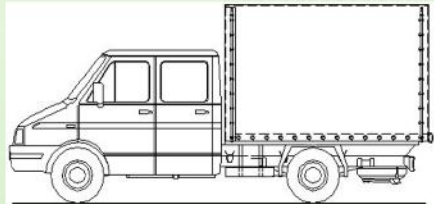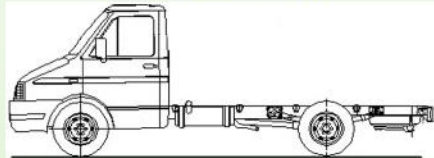

TEHNIČKI PODACI	ŠASIJA SA KABINOM		ŠASIJA SA PRODUŽENOM KABINOM		KAMION	KAMION SA PRODUŽENOM KABINOM		FURGON	FURGON SA POD. KROVOM	KOMBI 8+1						
	6+1	8+1	6+1	8+1		6+1	8+1									
<b>modeli</b>	35.12H	40.12H	35.12H	40.12H	40.12H	35.12H	40.12H	35.12H	40.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	
<b>PNEUMATICI</b>	215/75 R16	185/75 R16	215/75 R16	185/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	
<b>OSNO RASTOJANJE (mm)</b>	3310		3310		3310	3310		3310	3310	3310	2800	3310	3310	2800	2800	
<b>DUŽINA VOZILA (mm)</b>	5740		5740		5740	5780		5915	5940	5940	4815	5965	5965	4815	4815	
<b>ŠIRINA VOZILA (mm)</b>	2000		2000		2000	2140		2140	2140	2140	2000	2000	2000	2000	2000	
<b>VISINA VOZILA (mm)</b>	2200		2200		2200	2200		2200	2200	2200	2460	2460	2820	2820	2380	
<b>UNUTRAŠNJA DUŽINA TOV. SANDUKA / PROSTORA (mm)</b>						3493		2801	2140	2140	2463	3613	3613	2463	3613	
<b>UN.ŠIRINA TOV. SANDUKA/PROSTORA (mm)</b>						2073		2073	2073	2073	1820	1820	1820	1820	1820	
<b>VISINA TOV. SANDUKA / PROSTORA (mm)</b>						400		400	400	400	1512	1512	1885	1885	1885	
<b>ZAPREMINA TOVARNOG PROSTORA (m<sup>3</sup>)</b>											6,7	9,9	8,4	12,4	12,4	
<b>VISINA PODA VOZILA OD TLA (mm)</b>	850		850		850	1100		1100	1100	1100	790	790	790	790	790	
<b>KORISNA NOSIVOST (kg)</b>	1480	2090	1290	1960		1830	1240	1910	1110	1780	1720	1200	1130	1800	1220	1820
<b>DOZVOLJENA UKUPNA MASA (kg)</b>	3500	4200	3500	4200		4200	3500	4200	3500	4200	4200	3500	4200	3500	4200	3500
<b>MAKSIMALNA BRZINA (km/h)</b>	102		102		102	102		102	102	102	102	102	102	102	102	102
<b>ZAPREMINA REZERVOARA ZA GORIVO (l)</b>	70		70		70	70		70	70	70	70	70	70	70	70	70
<b>SAVLADIVANJE MAKSIMALNOG USPONA (%)</b>	45		45		45	45		45	45	45	45	45	45	45	45	45

U OKVIRU POLITIKE UNAPREĐENJA PROIZVODA ZASTAVA KAMIONI MOGU BEZ PREDHODNOG OBAVEŠTENJA IZMENITI TEHNIČKE KARAKTERISTIKE.