



**ZASTAVA
KAMIONI**




NOVO TERENSKO VOZILO KOMBI 40.13 H (4x4) (8+1)



ZASTAVA KAMIONI

NOVO TERENSKO VOZILO KOMBI 40.13 H (4x4) (8+1)

Tip i vrsta motora Engine type	EURO 3 / CUMMINS ISF 2.8	Dizel, četiri takta sa direktnim ubrizgavanjem, (Common Rail) Diesel, four strokes direct fuel injection, (Common Rail)
Radna zapremina Displacement	2800 (cm ³)	
Max. snaga pri 3200 o/min Max. power at 3200 RPM	96 kW / 130 KS (HP)	
Max. obrtni moment pri 1600 o/min Max. torque at 1600 RPM	310 Nm	
Vrsta hlađenja Cooling type	Vodeno Water	
Spojnicica Clutch	Suva jednolamelasta 11" (280mm) Dry with a single disc 11" (280mm)	
Menjač Gearbox	5S 400 ZF	Mehanički sa 5 sinhronizovanih stepena prenosa napred i hodom unazad Mechanical with 5 synchronized gears for forward movement and reverse
Upravljač Steering wheel	Hidraulički sa servo dejstvom Hydraulic with servo action	
Komande blokade	- elektro komanda blokade razdelnika pogona - elektro komanda diferencijala u prednjem mostu - elektro komanda diferencijala u zadnjem mostu - electric blockade command separator drive - differential electrical command in the front bridge - differential electrical command in the rear bridge	
Blockade commands		
Prednji most Front axle	sa prostom redukcijom i električnom blokadom diferencijala prenosni odnos u diferencijalu 5,22 with simple reduction and the electric differential blockade transmission ratio in the differential..... 5,22	
Zadnji most Rear axle	sa prostom redukcijom i električnom blokadom diferencijala prenosni odnos u diferencijalu 5,22 with simple reduction and the electric differential blockade transmission ratio in the differential..... 5,22	
Razdelnik pogona RM 225D	mehanički, dvostepeni sa blokadom diferencijala, stalni pogon 4x4 prenosni odnos u razvodniku pogona visoki prenos direktni 1,051 / niski prenos – redukovani 3,937	
Distributor drive RM 225D	mechanical, two-stage with differential blockade, continuous drive 4x4 transmission ratio in the distributor drive high direct transfer 1,051 / low transfer – reduced 3,937	
Kočnica ABS + EBD + ABD	radna kočnica – hidraulička sa pedalom deluje na sva četiri točka sa depresionim servopojčačivačem i nezavisnom cirkulacijom za prednje i zadnje točkove, Napred: disk; Nazad: disk	
Breaks ABS + EBD + ABD	parkirna kočnica – mehanička, ručna deluje na zadnje točkove. main brakes - hydraulic pedal works on all four wheel drive with depression servo-amplifier and independet circulation in front and rear wheels Front: disk; Rear: drums parking brake - mechanical, hand brake and acting on the rear wheels	
Pneumatici Tyres	255/100 R16	

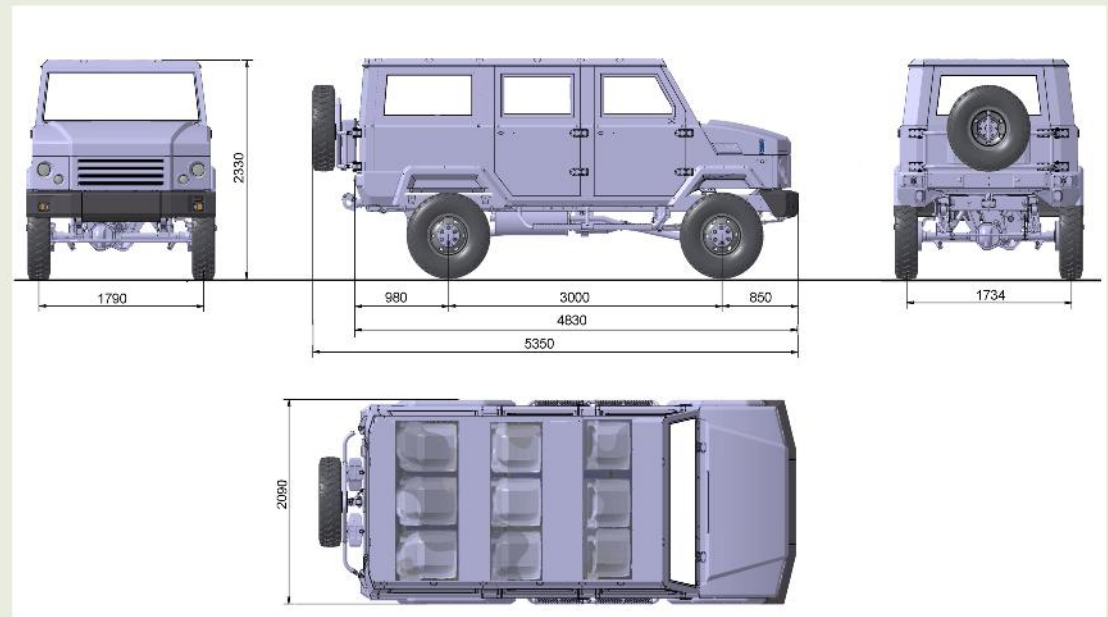

Razmak osovina Wheelbase	3000 (mm)
Maksimalna dužina Maximal length	5350 (mm)
Maksimalna širina Maximal width	2090 (mm)
Klirans Clearance	260 (mm)
Korisna nosivost Payload	1200 (kg)
Masa vozila sa punim opterećenjem The mass of the vehicle with full load	4800 (kg)
Masa vozila spremnog za vožnju sa vozačem Mass of unloaded vehicle with driver	3600 (kg)
Max. dozvoljeno opterećenje na prednjoj osovini Max. permissible load on the front axle	2000 (kg)
Max. dozvoljeno opterećenje na zadnjoj osovini Max. permissible load on the rear axle	3400 (kg)

ZASTAVA KAMIONI d.o.o, Kragujevac
- u restrukturiranju
Kosovska 4 · 34000 Kragujevac · Republika Srbija
tel: ++381 34 336 160 · fax: ++381 34 335 319
e-mail: prodaja@zastava-kamioni.co.rs
www.zastava-kamioni.co.rs

